

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 March 2001 (15.03.2001)

PCT

(10) International Publication Number
WO 01/19075 A2

(51) International Patent Classification⁷:
H04B 7/08

H04N 5/21,

(74) Agents: **TRIPOLI, Joseph, S. et al.**; Thomson multimedia
Licencing Inc., P.O. Box 5312, Princeton, NJ 08540 (US).

(21) International Application Number: PCT/US00/24708

(22) International Filing Date:
8 September 2000 (08.09.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/152,859 8 September 1999 (08.09.1999) US

(71) Applicant (for all designated States except US): **THOMSON LICENSING S.A.** [FR/FR]; 46, quai Alphonse Le Gallo, F-92648 Boulogne Cedex (FR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CRANOR, Thomas, Howard, Bruce** [US/US]; 9503 Nora Lane, Indianapolis, IN 46240 (US). **HALL, Edward, Allen** [US/US]; 868 Desert Wind Court, Carmel, IN 46032 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— Without international search report and to be republished upon receipt of that report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND APPARATUS FOR REDUCING MULTIPATH DISTORTION IN A TELEVISION SIGNAL

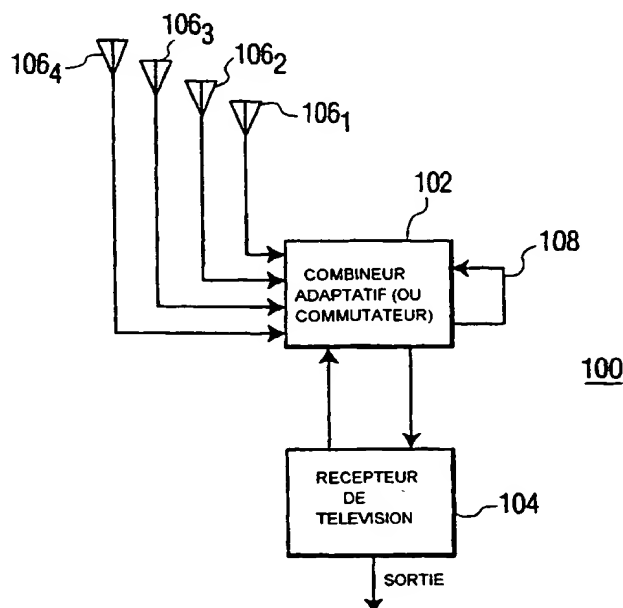

(57) Abstract: A method and apparatus for reducing multipath distortion in a television signal includes a plurality of antenna elements for receiving spatially unique replicas of a desired television signal. The plurality of spatially unique replicas of the television signal are coupled to an adaptive combiner for generating a spatially combined signal to be input to a television receiver.

WO 01/19075 A2

METHOD AND APPARATUS FOR REDUCING MULTIPATH DISTORTION IN A TELEVISION SIGNAL

This application claims benefit of U.S. provisional patent application serial
5 number 60/152,859, filed September 8, 1999 and herein incorporated by
reference.

The invention generally relates to method and apparatus for receiving a
television signal, and more particularly, to an antenna system for adaptively
reducing multipath distortion in a received television signal.

BACKGROUND OF THE INVENTION

10 Terrestrial television broadcast signals have long been plagued by
multipath distortion. The transmitted television signal is reflected off of buildings
and other large objects causing the reception of undesired multiple signals at the
15 receiver. The undesired signals combine with the transmitted signal and produce
what are commonly known as "ghost images" on the television screen. When
receiving terrestrial digital broadcast television signals, such as high definition
television (HDTV) signals, ghosting can completely prohibit image formation.
Multipath distortion is particularly problematic in urban environments where a
20 severe reduction in the amplitude of the received television signal can result due
to interference nodes present in the incident fields. A small antenna of the type
commonly found in urban environments can be completely enveloped in such a
node, resulting in a loss of the television signal altogether.

Present techniques for removing multipath distortion in a television signal
25 for both analog and digital television signal reception are based on adaptive
equalization within the television receiver. Such techniques are only effective,
however, in environments where multipath distortion is not too severe. In severe
multipath environments, such as when multipath distortion results in a field node
present at the antenna, present equalization techniques are insufficient to correct
30 the distortion.

Therefore, there exists a need in the art for an antenna system that reduces multipath distortion in a television signal before the signal is coupled to the television receiver.

5 SUMMARY OF THE INVENTION

The disadvantages associated with the prior art are overcome by a method and apparatus for reducing multipath distortion in a television signal. Specifically, a plurality of antenna elements receive spatially unique replicas of a desired television signal. The spatially unique replicas are coupled to an adaptive
10 combiner, which generates a spatially combined signal to be coupled to a television receiver. The adaptive combiner forms a weighted summation of the spatially unique replicas, which effectively places spatial nulls in the directions of multipath interference. The weighting information is provided by an adaptive controller that uses intelligence from a multipath processor located within the
15 apparatus. The intelligence may take the form of a figure of merit derived from the combiner output, or from processing performed on the input signals themselves.

BRIEF DESCRIPTION OF THE DRAWINGS

20 The teachings of the present invention can be readily understood by considering the following detailed description in conjunction with the accompanying drawings, in which:

FIG. 1 depicts a block diagram of an apparatus in accordance with the present invention;

25 FIG. 2 depicts a block diagram of one embodiment of an adaptive combiner;

FIG. 3A shows a perspective view of a four-port loop antenna;

FIG. 3B shows a top view of a four-port loop antenna;

FIG. 3C shows a detailed side view of a feed port;

30 FIG. 3D shows a detailed top view of a feed port;

FIG. 3E shows a detailed top view of a feed port with a transformer;

FIG. 4A illustrates basic and controlled radiation patterns of the present invention for low frequencies;

FIG. 4B illustrates basic and controlled radiation patterns of the present invention for high frequencies; and

5 FIG 5 illustrates the configuration of a clover antenna design.

To facilitate understanding, identical reference numerals have been used, where possible, to designate identical elements that are common to the figures.

DETAILED DESCRIPTION

10 FIG. 1 depicts a block diagram of an apparatus 100 for reducing multipath distortion in a television signal. The apparatus 100 comprises a plurality of antenna elements 106 (e.g., four are shown), an adaptive combiner 102, and a television receiver 104. The antenna elements 106 receive an RF signal corresponding to a desired terrestrially broadcast television channel selected from
15 a plurality of channel locations in a frequency band. The RF signals corresponding with broadcast channels are analog and digital television signals. The analog signal may comprise a conventional National Television Standard Committee (NTSC) modulated signal within the United States. The digital television signal may comprise a Vestigial Sideband (VSB) modulated signal in
20 compliance with the Advanced Television Systems Committee (ATSC) standard A/53, for example, a high definition television (HDTV) signal. The system described herein could also be configured to function with other formats, such as European, by appropriate changes in the input section of the system.

Each antenna element 106 receives a spatially unique replica of the desired
25 television signal (i.e., a replica of the television signal having a unique amplitude and phase associated with the angle of incidence). Each spatially unique replica is coupled to the adaptive combiner 102 for spatial processing. The adaptive combiner 102 generates a weighted summation of the spatially unique replicas that effectively places spatial nulls in the directions of multipath interference.
30 The spatial processing of the adaptive combiner 102 is adaptive in that the (1) weighting information is generated using a figure of merit (FoM) 108 that is a

measure of how well the apparatus 100 is operating, or (2) the weights are determined by direct processing of the input signals. The output of the adaptive combiner 102 is coupled to a television receiver 104 for demodulation and display of the television information.

FIG. 2 depicts a block diagram of one embodiment of an adaptive combiner 102. The adaptive combiner 102 comprises a plurality of tuning modules 202, a summer 208, a multipath processor 216, an adaptive controller 210, and a local oscillator (LO) 212. Each of the plurality of tuning modules 202 comprises a tuner 204 and a weight 206. Each of the plurality of antenna elements 106 is coupled to a respective one of the plurality of tuning modules 202. Specifically, with respect to tuning module 202₁, the spatially unique replica of the desired television signal generated by antenna element 106₁ is coupled to the tuner 204₁. The tuner 204₁ outputs an intermediate frequency (IF) signal corresponding to the desired television signal. The desired television signal is determined by the LO 212, which generates a LO signal having the appropriate frequency. The resulting IF signal is weighted by the weight 206₁ and coupled to the summer 208. It should be recognized that the signal may be digitized (using digitizer 205₁) at the output of the tuner, so that the adaptive processing may be performed mathematically.

Each of the plurality of tuning modules 202 operates in accordance with the above description causing a plurality of weighted spatially unique replicas of the desired television signal to be coupled to the summer 208. The summer 208 combines the plurality of weighted replicas to generate a spatially combined television signal. The spatially combined television signal is coupled to the television receiver 104 for demodulation and display of the television information as shown in FIG. 1. The format of the output from the combiner is chosen to be compatible with the receiver equipment. For example, the signal may be converted to the same frequency and modulation as originally sought by the TV. Alternatively it may be left as-is for a TV receiver that is appropriately configured.

The adaptive combiner 102 reduces multipath distortion in the desired television signal by appropriately adjusting each of the weights 206. Each weight 206 both adjusts the amplitude, and delays in time, the IF signal associated with the respective spatially unique replica of the desired television signal. Those skilled in the art could readily devise other forms for the weights, including, but not limited to, weighting both amplitude and phase, weighting amplitude only, weighting phase only, and performing a time delay only. One can also perform the weighting function directly on the RF signal, as is more typical of phased array antennas well known in the art. The choice is a matter of convenience in the chosen method of implementing the weights.

The adaptive controller 210 determines the value of each weight (i.e., the amount of amplification or attenuation and the amount of time delay) pursuant to an adaptive algorithm. In one embodiment of the invention, the adaptive algorithm utilizes a cross-correlation matrix that has the plurality of spatially unique replicas of the desired television signal as input. Specifically, the adaptive controller 210 selects a spatially unique replica, for example the replica generated by antenna element 106₁, and computes a cross-correlation matrix between the selected replica and the remaining spatially unique replicas. Upon the determination that the desired television signal contains a multipath component, the adaptive controller 210 adjusts, for example, the weight 206₂ corresponding to the spatially unique replica generated by antenna member 106₂. The weight 206₂ is adjusted so as to temporally align its respective spatially unique replica with the selected replica and to invert the detected multipath component. It should be recognized that the temporal delay need not be valued at the full measure of the delay between the direct and ghosted signals, but that essentially the same performance may be achieved by a delay period of the appropriate fraction of one RF period. This method, combined with a broadband inverter function (mathematical in the digital case or analog otherwise) will provide equally effective nulling in the direction of unwanted signals without the expense of the long tapped delay lines that would be required to capture the full delay time of the ghosted signal. This fact is one of the significant advantages of the

present system versus an approach based solely on equalization, wherein full time delay is an absolute requirement.

When the summer 208 combines the two replicas, the multipath component is canceled from the desired television signal. In this manner, the adaptive controller 210 is able to cancel two more multipath components (for a total of three in the present embodiment) utilizing the spatially unique replicas from antenna members 106₃ and 106₄. In general, the apparatus 100 is able to cancel a number of multipath components which is one less than the number of antenna elements 106 (i.e., one less than the number of degrees of freedom). A larger number of multipath components may be addressed, with some compromise, by a least mean squares minimization of the total multipath energy. Those skilled in the art may readily devise other schemes for optimal weighting.

Alternatively, the performance at the combiner output may be used to derive a net figure of merit. In this case the adaptive process must blindly gravitate toward an optimal solution by gradient search-type algorithms well known in the literature.

The multipath processor 216 is coupled to the output of the summer 208 for analyzing the spatially combined signal to generate the FoM. The FoM depends upon the type of the signal being received (i.e., analog or digital). For NTSC signals, the FoM is based on an examination of various synchronous signals associated with the standard broadcast format. For digital signals, the multipath processor 216 calculates the signal-to-noise ratio. The FoM is output to the adaptive controller 210. In an alternative embodiment of the invention, the FoM could be derived from the receiver electronics according to a standardized protocol for such systems as shown by signal path 218.

In a lower cost alternative embodiment, the adaptive combiner 102 is reduced to a selector switch, which simply selects one of the available antenna ports for reception, while terminating the other ports with matched loads. The port selection process of such an embodiment could be based either on the same FoM as in the fully adaptive implementation, or simply on a memory look-up table of pre-arranged values selected by the user during a previous set-up mode of

operation. Such a low-cost system lacks the gain and nulling performance of the fully adaptive system, but still provides substantially improved performance in the urban environment versus a simple static antenna.

FIG. 3A shows a perspective view of an illustrative antenna 300 in accordance with the present invention. The antenna 300 is a multi-port loop antenna that is particularly well suited for use in an urban environment where signal strength is of less concern than multipath distortion. In one embodiment, the antenna 300 is a four-port loop antenna comprising a loop 302 formed from four flat strip conductors 302A, 302B, 302C, and 302D having four feed ports 306, and four feed lines 304 coupled to the loop 302 via mechanical couplers 308. The loop 302 has a circular cross-section and the feed ports 306 are disposed at 90° intervals on the perimeter of the loop 302. Each feed line 304 is mechanically coupled to the loop 302 midway between a respective pair of feed ports 306. The feed lines 304 extend radially inward from, and substantially to the center of, the loop 302. At the center of the loop 302, the feed lines 304 bend 90° at point 310 and extend away from the loop 302. The structure of the antenna 300 provides a convenient geometry for a supporting shell structure, making the design viable for set-top use.

The loop 302 is formed of foil, sheet metal, printed circuit board, or any combination thereof. In one embodiment, the loop comprises a conductive layer deposited upon, or otherwise attached to, a dielectric substrate 302S. The layer forms each of the conductive strips 302A, 302B, 302C, and 302D. Although FIG. 3A shows the loop 302 having a circular cross-section, those skilled in the art could readily devise alternative cross-sections. Furthermore, the loop may not be formed as a wide strip; however, the wide strip is practical and provides a substantially constant impedance over the broadcast frequency range. In another embodiment of the invention, the width of the strip conductor may also be oriented in the plane of the loop, as in an annulus.

FIG. 3B shows the top view of the antenna 300. Each feed line 306 bends 90° (at point 310) after the mechanical coupler 308 and extends along the perimeter of the loop 302. The coax shield of each feed line 306 is terminated

on one side of a respective feed port 306 while the coax center conductor crosses the feed port 306 and joins a geometrically symmetric dummy coax structure 312 on the other side. FIG. 3C shows a close-up, side view of the structure of a feed port 306 and FIG. 3D shows a close-up, top view of the feed port 306. In the depicted embodiment, the loop 302 comprises a conductive layer 302A and 302B deposited upon an outer surface of a substrate 302S. The conductive strips 302A, 302B, 302C, and 302D are made narrow at each feed port 306 and a gap 314 (no conductor present) is formed between the conductive strips 302A, 302B of the loop 302 at the feed point 306. The feed lines 304 are coaxial cables, the shield of which is grounded to the loop 302 at the point where the feed line 304 is mechanically coupled to the conductive layer 302A of the loop 302. The narrow portion of the loop reduces stray reactance at those points, whereas the wider sections of the loop draw current away from the coaxial cables connections thereby reducing coupling to the feed lines 304. The increased width also acts to reduce the intrinsic reactance of the strip itself, thereby stabilizing the input impedance with respect to frequency. A width of at least two centimeters is needed to realize this effect. Alternatively a circular cross section conductor may be used, such as a wire or tube, with an outer diameter of at least one centimeter to achieve the desired stable impedance. As mentioned above, at each feed point 306, the center conductor 318 of the coaxial cable 304 spans the gap 314 and is grounded on the opposing side 320 of the gap 314 via the dummy coax 312. The coaxial cable 304 and dummy coax structure 312 form a self-balun.

Ferrite beads or sleeves 316 may be optionally placed around each feed line 304 to reduce coupling directly into the coaxial cables and reduce parasitic radiation by the coaxial cables.

As shown in FIG. 3E, impedance matching transformers 322 may be placed at the feed points 306, or at other points in the circuit, for improved matching to the tuner. Specifically, the matching transformer 322 has input terminals 324 coupled to the coaxial cable center conductor 318 and conductive

strip 302A and has output terminals 326 coupled to the dummy coax structure 312 and the conductive strip 302B.

In an alternative embodiment of the invention, the transformer 322 is inserted at the mechanical coupler point. Thus the coax grounded the surface of the loop is replaced by a wire line which acts in conjunction with the conducting surface in the manner of a standard twin-lead transmission line wherein the strip conducting surface is situated on the plane of symmetry of such a line.

An alternative feed configuration for the antenna comprises a 300-ohm twin-lead transmission lines connected directly to the loop ports. The twin-leads would connect to in-line baluns at the hub of the loop. A classical Beverage antenna may be configured in this manner such that when the Beverage antenna is rotated to point directly at the signal source, the antennas single feed line would be oriented end-on to the incident field. As such, there would be little or no coupling to the feed line itself.

In another alternative feed structure, the transformer 322 can be positioned "in-line" at a location away from the feed point 306. As such, each of the coaxial cables 304 would terminate at a transformer 322 located, for example, at the bend point 310. Each transformer would be enclosed in a shielded housing. A high impedance coaxial cable (e.g., 300 ohms) would be used as the transmission line from the transformer to the feed point 306.

The antenna structure described in FIG. 3 is illustrative of that which can be used for the plurality of antenna members 106 as shown and described in FIGs. 1 and 2. Those skilled in the art could readily devise alternative arrangements of multiple antenna elements and/or multiport antennas. The multi-port loop antenna as herein described is particularly appropriate for use in urban environments where high gain is not as important as control of multipath distortion. Arrays of specifically targeted high gain elements, such as Yagi-Uda or log-periodic elements, can be used where more gain is required.

FIG. 4A depicts an illustrative radiation pattern obtained by the apparatus 100 of the present invention for low frequencies. The direction of the desired television signal is 0° and the directions of the multipath components are 90°,

180°, and 270°. In this example, the apparatus 100 forms pattern nulls at the multipath incident angles while maintaining gain in the desired signal direction.

FIG. 4B depicts an illustrative radiation pattern obtained by the apparatus 100 of the present invention for high frequencies. Again, the direction of the desired signal is 0° but the directions of the multipath components are now 135°, 180°, and 225°. The apparatus 100 forms pattern nulls at the multipath incident angles while maintaining gain in the desired signal direction. For higher frequencies, the main lobe of the pattern becomes more directional than for lower frequencies.

FIG. 5 depicts an alternative embodiment of the antenna 500. The antenna 500 is a clover antenna comprised of a loop 502 having four Vivaldi flared-notch antennas 502A, 502B, 502C, and 502D facing orthogonal directions. The loop 502, as a whole, operates in the VHF band as a modified, Beverage antenna, while the Vivaldi elements 502A, 502B, 502C, and 502D provide directional patterns in the UHF band. The elements may have a wider conductor along the flares to support the currents known to flow on the surface adjacent to the actual aperture on standard Vivaldi antennas.

As with the previous embodiment of the antenna, this alternative embodiment may be formed of wire, tubing, printed circuit board trace, foil, thin metal, and the like. The four-antenna element arrangement allows for selecting a particular antenna pattern. The pattern is selected by selecting a particular antenna port 504A, 504B, 504C or 504D. Each port provides a reception signal with unique amplitude and phase characteristics. Additional antenna patterns that are pointed at intermediate angles are possible by coupling the multiple antenna ports into a combining and phasing network.

The four Vivaldi elements 502A, 502B, 502C and 502D can be isolated from one another when not used in a loop configuration for VHF signal reception. Such isolation provides improved UHF pattern performance. The isolation can be provided by using mechanical relays, PIN diode switches, or a frequency selective circuit network between Vivaldi antenna element edges (e.g., at locations 506).

Although various embodiments which incorporate the teachings of the present invention have been shown and described in detail herein, those skilled in the art can readily devise many other varied embodiments that still incorporate these teachings.

CLAIMS

1. An apparatus for reducing multipath distortion in a television signal, which
5 comprises:

a plurality of antenna elements for receiving the television signal, wherein
each of said plurality of antenna elements receives a respective one of a plurality
of spatially unique signals, each of said plurality of spatially unique signals being
a different replica of the television signal;

10 an adaptive combiner, coupled to said plurality of antenna elements, for
generating a spatially combined signal; and

a receiver, coupled to said adaptive combiner, for demodulating said
spatially combined signal.

15 2. The apparatus of claim 1 wherein said plurality of antenna elements
comprises a loop antenna having a plurality of feed ports, each of said plurality of
feed ports being disposed around the perimeter of said loop antenna so as to
receive a respective one of said plurality of spatially unique signals.

20 3. The apparatus of claim 1 wherein said adaptive combiner comprises:
a plurality of tuning modules, each of said tuning modules having a tuner
and a weight for selecting a respective one of said plurality of spatially unique
signals and generating a weighted spatially unique signal;

25 a summer, coupled to said weight of each of said plurality of tuning
modules, for combining each weighted spatially unique signal to generate said
spatially combined signal;

a multipath processor, coupled to said summer, for generating a figure of
merit; and

an adaptive controller, coupled to said multipath processor and said weight of each of said plurality of tuning modules, wherein said adaptive controller controls the value of each weight using an adaptive algorithm having said figure of merit as input.

4. The apparatus of claim 3 wherein said adaptive algorithm comprises a cross-correlation algorithm.

5. A method for reducing multipath distortion in a television signal, which comprises:

receiving a plurality of spatially unique signals, each of said spatially unique signals being a different replica of the television signal;
combining said plurality of spatially unique signals to generate a spatially combined signal; and
demodulating said spatially combined signal.

6. The method of claim 4 wherein said combining step comprises:

weighting each of said plurality of spatially unique signals using weights to generate a plurality of weighted spatially unique signals;
summing said plurality of weighted spatially unique signals to generate said spatially combined signal;
processing said spatially combined signal to derive a figure of merit; and
controlling the value of said weights via an adaptive algorithm having said figure of merit as input.

7. The method of claim 3 wherein said adaptive controller uses the figure of merit to select a single one of the said plurality of received signals according to its individual pattern characteristics with respect to favoring a desired signal versus multipath components..

8. The method of claim 3 wherein said adaptive controller uses a manual user selection, stored in a memory.
9. A loop antenna comprising:
- 5 a plurality of conductive strips arranged in a circular pattern, where each strip comprises at least one narrowed portion;
- a feed point comprising a gap defined by said at least one narrow portions of each strip;
- 10 a signal coupler proximate said feed point for coupling signals from said plurality of conductive strips.
10. The loop antenna of claim 9 wherein said signal coupler comprises:
- a coaxial cable having a shield coupled to a first conductive strip and a center conductor spanning the gap and coupled to a dummy coaxial cable formed
- 15 on a second conductive strip.
11. The loop antenna of claim 9 wherein said signal coupler comprises:
- a impedance matching transformer.
- 20 12. The loop antenna of claim 9 wherein said plurality of conductive strips are formed upon a circular substrate.
13. The loop antenna of claim 9 wherein each of said conductive strips in said plurality of conductive strips forms a Vivaldi antenna element.

1/7

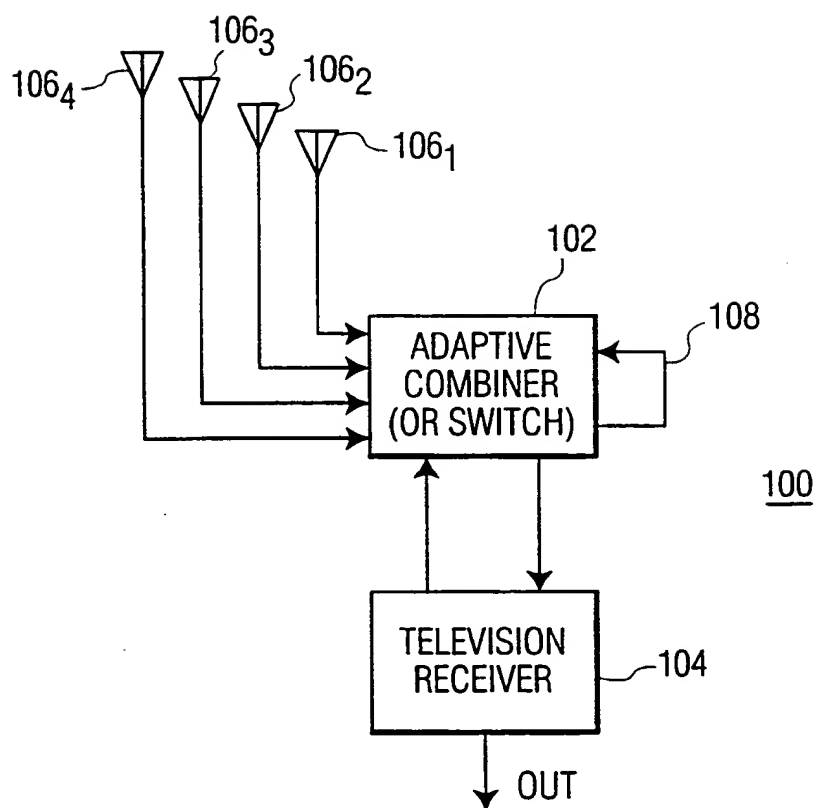


FIG. 1

2/7

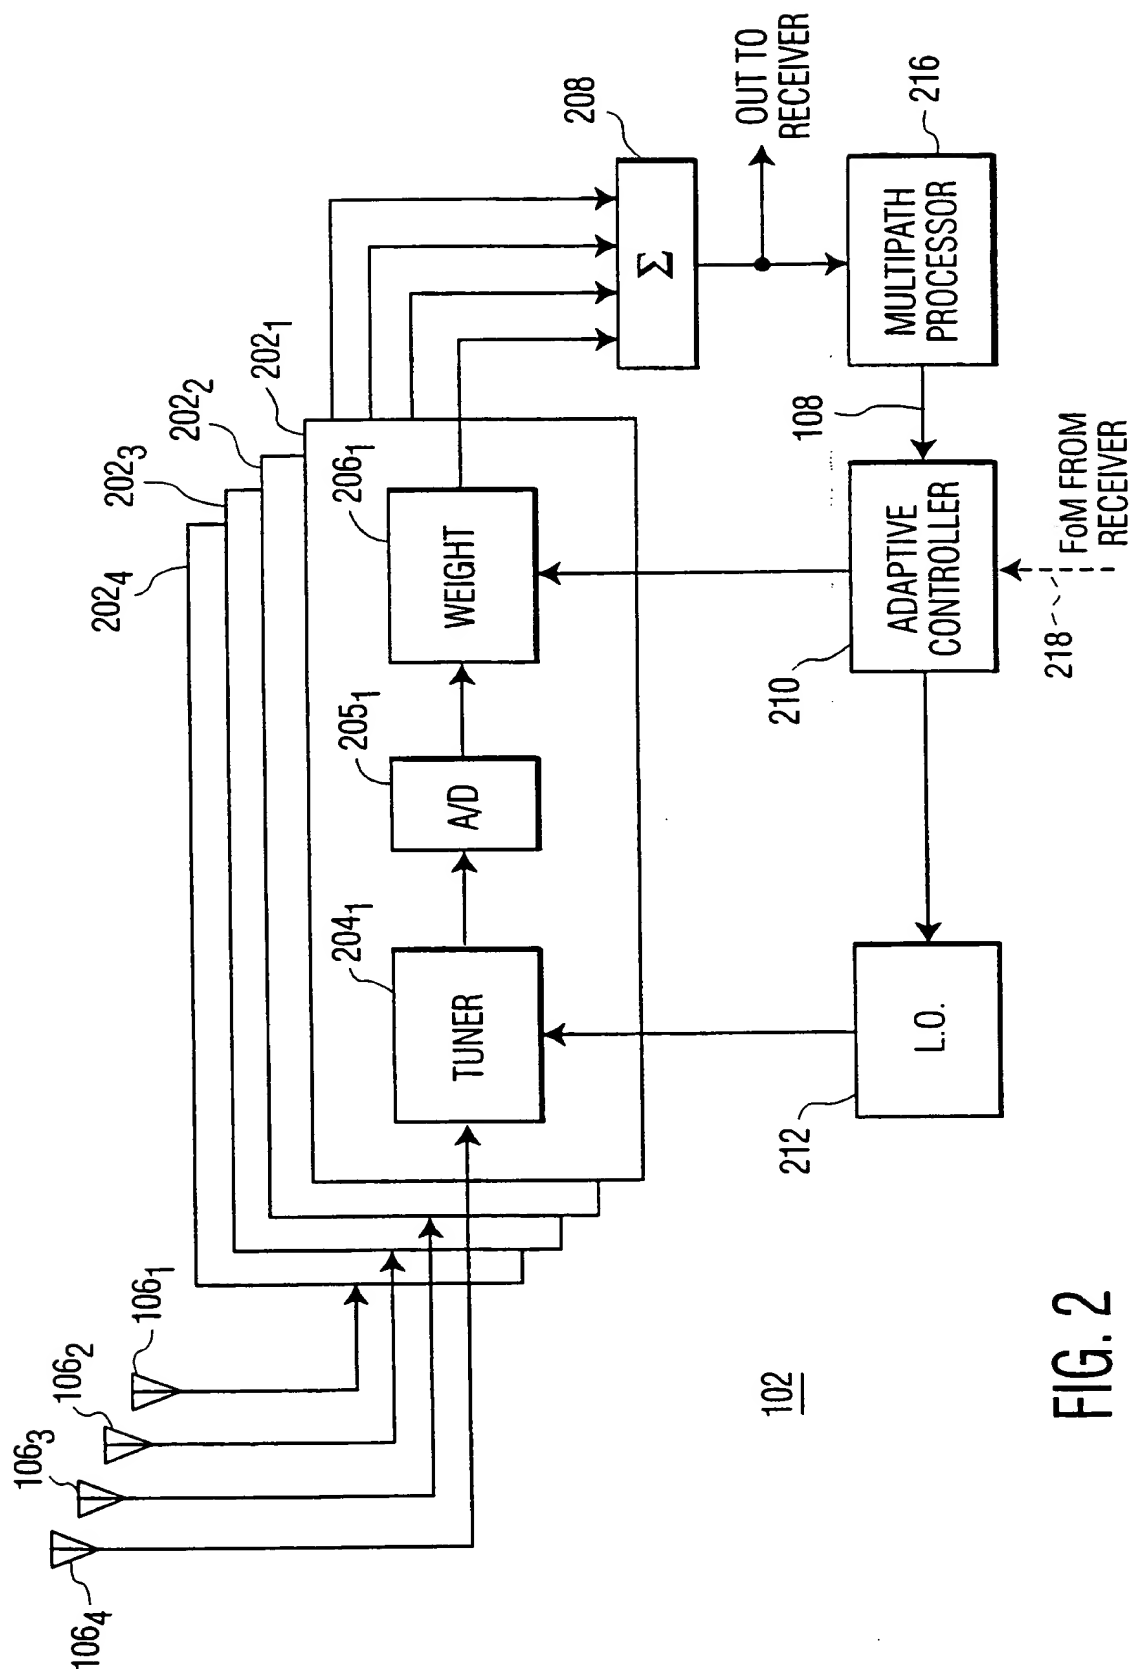


FIG. 2

3/7

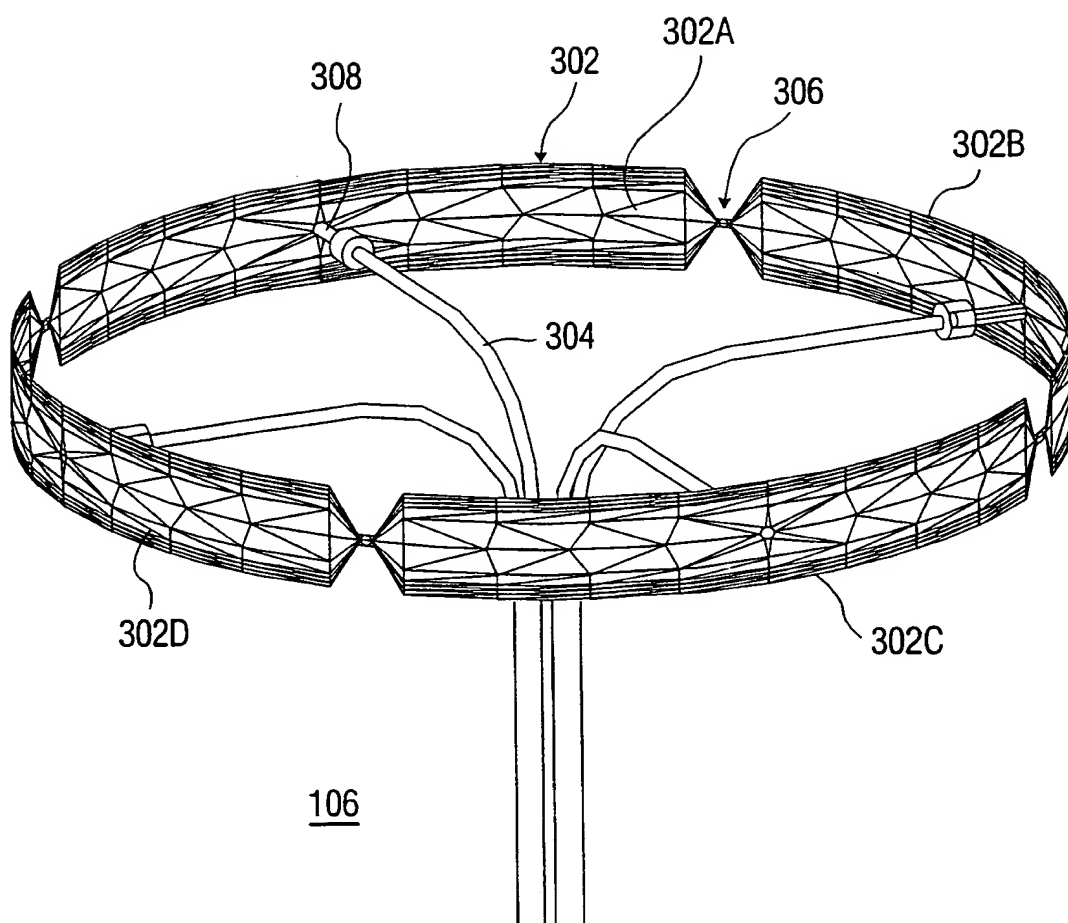


FIG. 3A

4/7

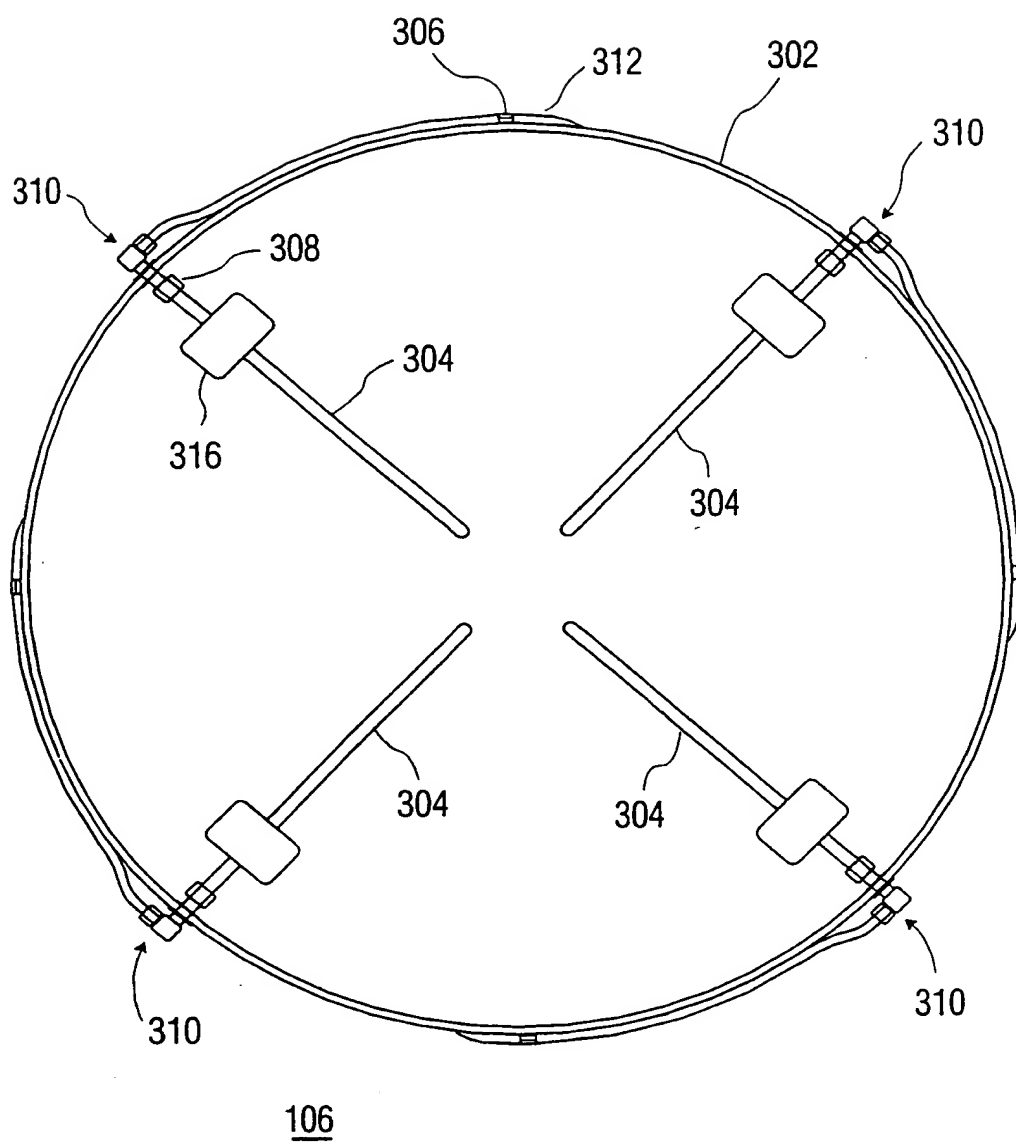


FIG. 3B

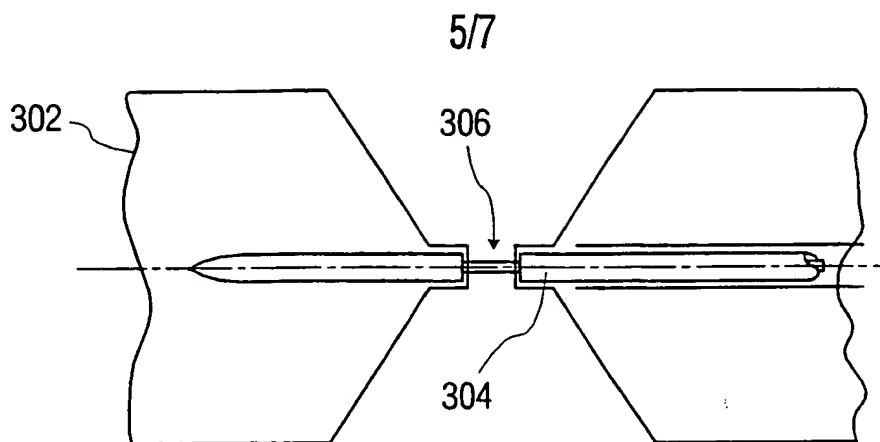


FIG. 3C

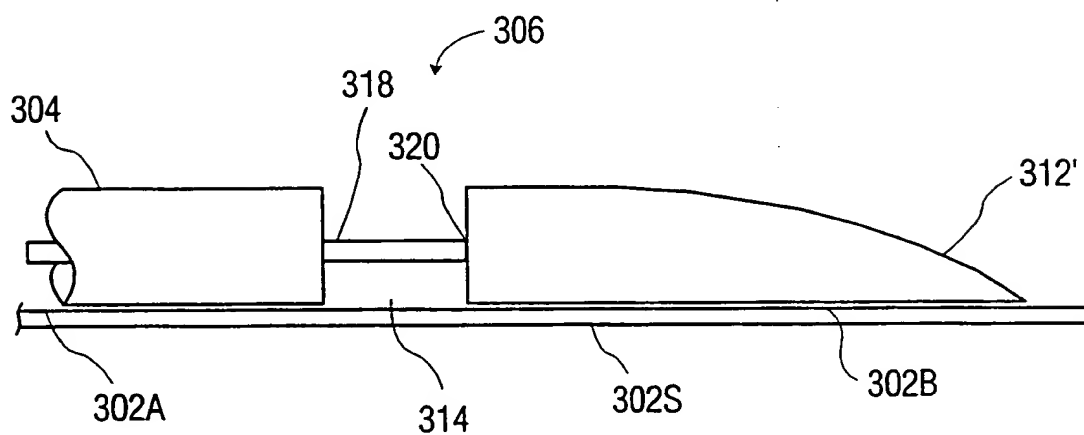


FIG. 3D

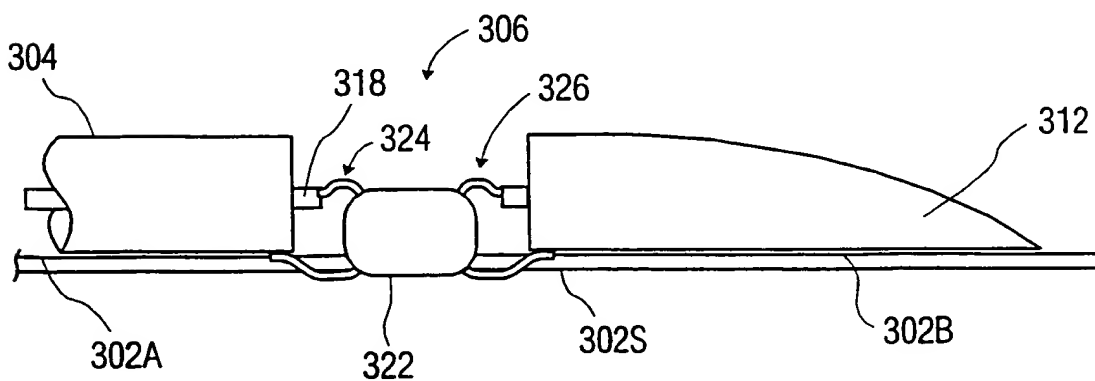


FIG. 3E

6/7

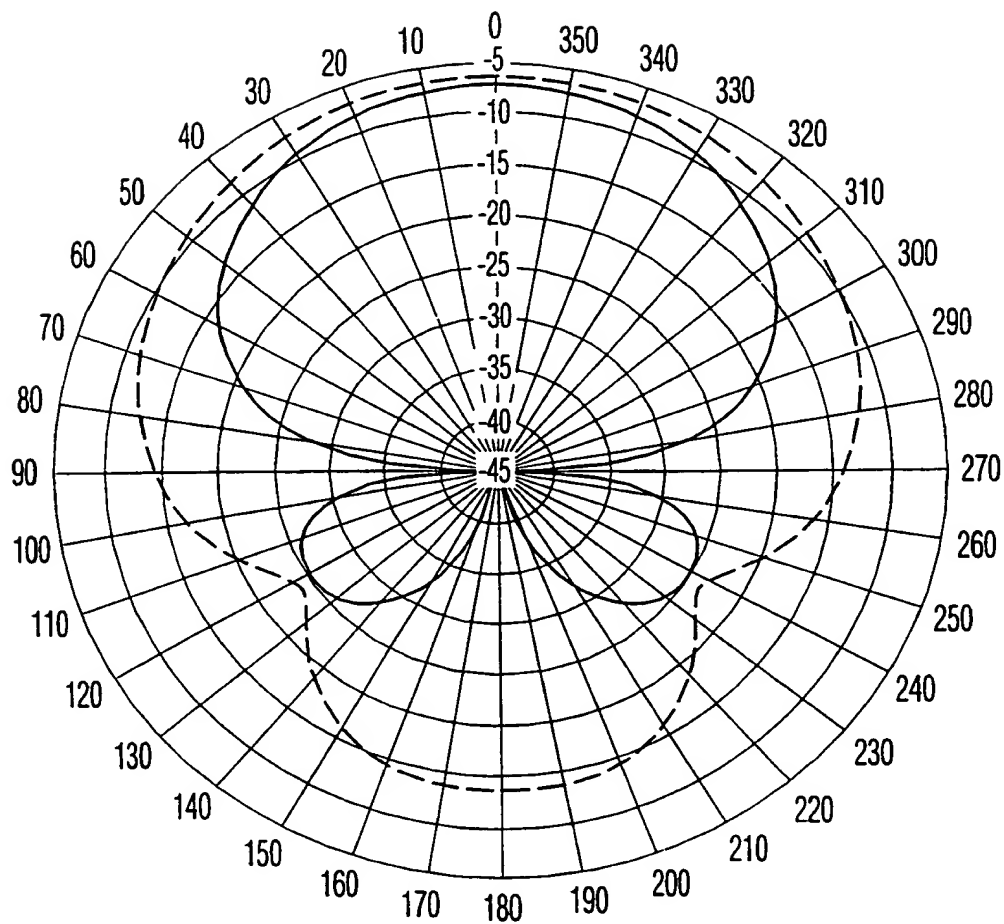


FIG. 4A

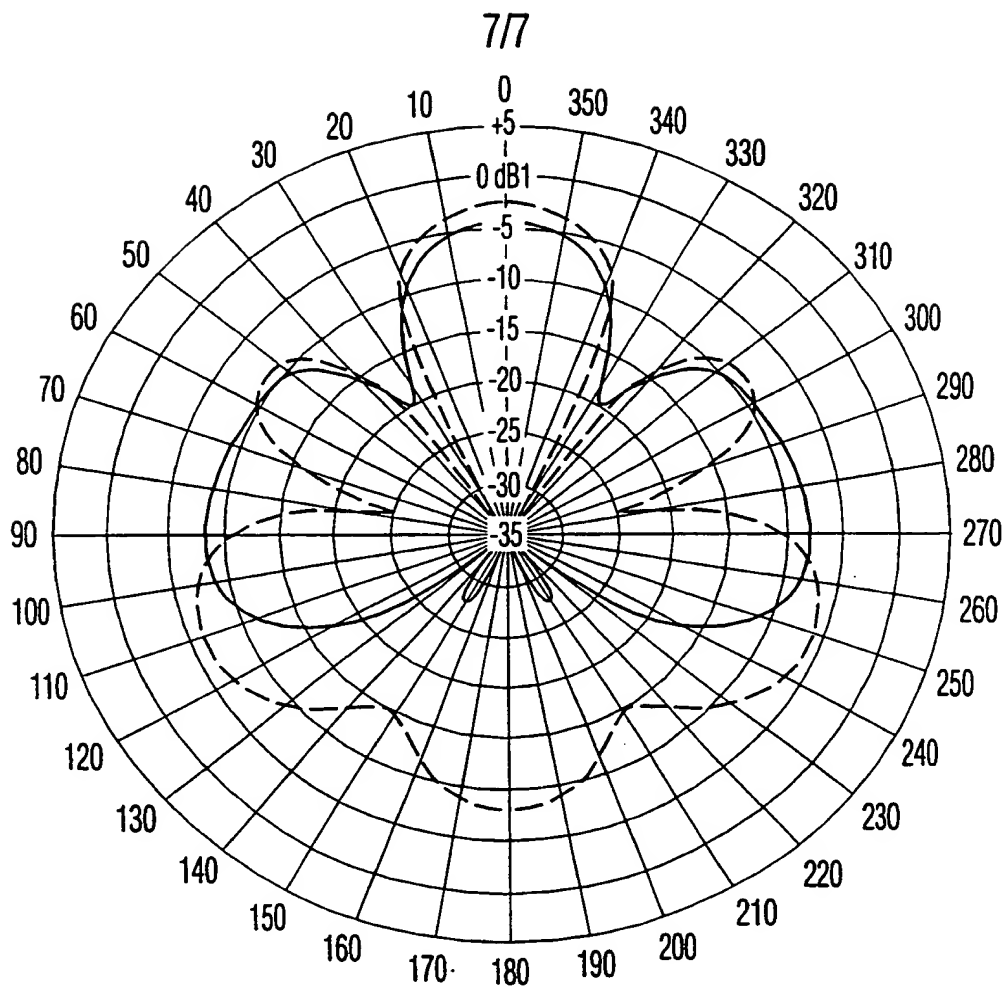


FIG. 4B

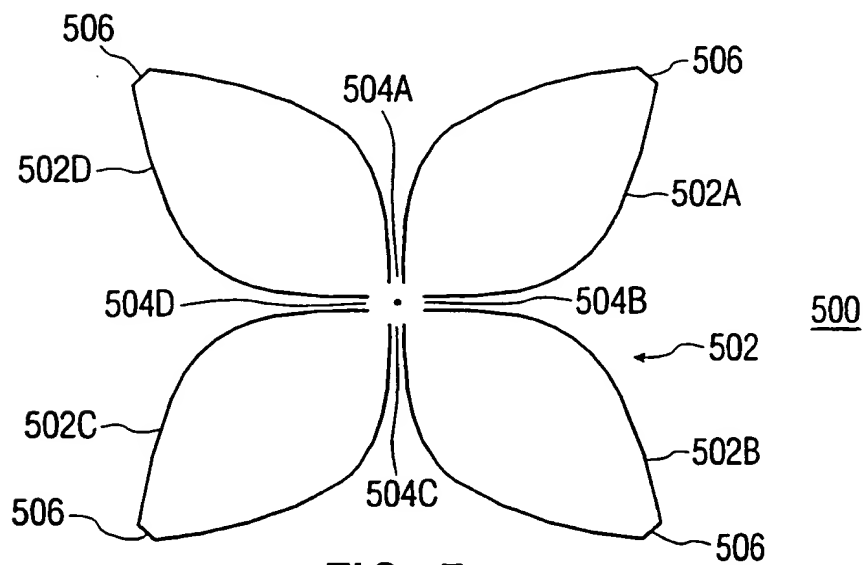


FIG. 5

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 March 2001 (15.03.2001)

PCT

(10) International Publication Number
WO 01/19075 A3

(51) International Patent Classification⁷: **H04N 5/21**,
H04B 7/08, H01Q 9/26

(21) International Application Number: PCT/US00/24708

(22) International Filing Date:
8 September 2000 (08.09.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/152,859 8 September 1999 (08.09.1999) US

(71) Applicant (for all designated States except US): **THOMSON LICENSING S.A.** [FR/FR]; 46, quai Alphonse Le Gallo, F-92648 Boulogne Cedex (FR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CRANOR, Thomas**,

Howard, Bruce [US/US]; 9503 Nora Lane, Indianapolis, IN 46240 (US). **HALL, Edward, Allen** [US/US]; 868 Desert Wind Court, Carmel, IN 46032 (US).


(74) Agents: **TRIPOLI, Joseph, S.** et al.: Thomson multimedia Licencing Inc., P.O. Box 5312, Princeton, NJ 08540 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR REDUCING MULTIPATH DISTORTION IN A TELEVISION SIGNAL

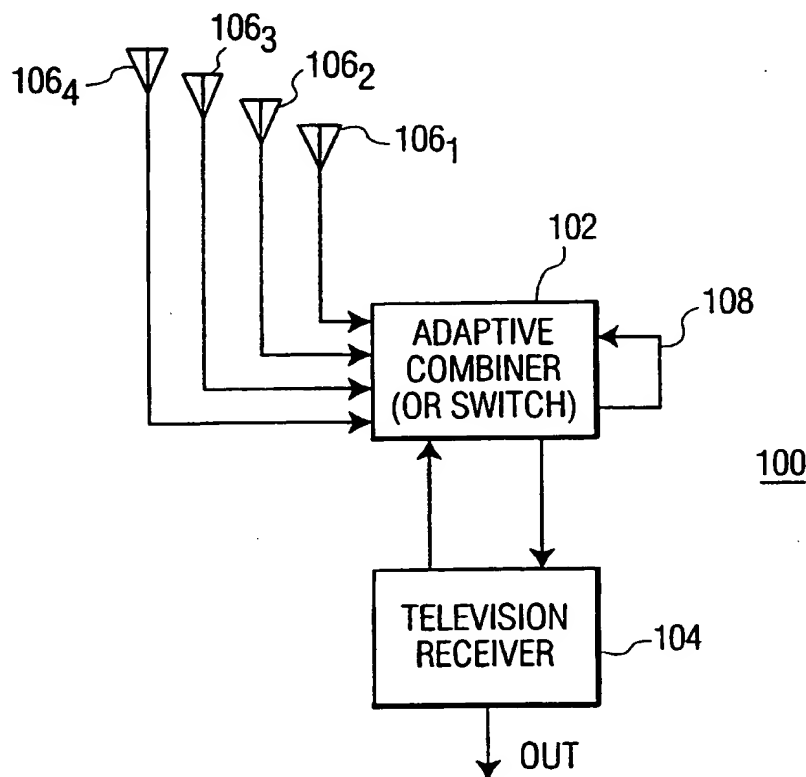

(57) Abstract: A method and apparatus for reducing multipath distortion in a television signal includes a plurality of antenna elements for receiving spatially unique replicas of a desired television signal. The plurality of spatially unique replicas of the television signal are coupled to an adaptive combiner for generating a spatially combined signal to be input to a television receiver.

WO 01/19075 A3



Published:

— with international search report

(88) Date of publication of the international search report:

20 September 2001

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

Inte. onal Application No

PCT/US 00/24708

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04N5/21 H04B7/08 H01Q9/26

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N H04B H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

PAJ, WPI Data, EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 100 496 A (AKIYOSHI TSUYOSHI ET AL) 11 July 1978 (1978-07-11) column 2, line 30 - line 44 column 5, line 5 - line 17; figure 4 ---	1,5
A	GB 2 257 605 A (BRENNAN PAUL VICTOR) 13 January 1993 (1993-01-13) page 1, paragraph 7 -page 2, paragraph 1; figure 1 ---	1,3,5,6
A	US 4 497 067 A (NAMIKI JUNJI) 29 January 1985 (1985-01-29) column 1, line 53 - line 25 column 3, line 34 - line 61; figure 2 --- -/--	1,5



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

26 February 2001

Date of mailing of the international search report

09.03.2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Fuchs, P

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 00/24708

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 498 885 A (NAMIKI JUNJI) 12 February 1985 (1985-02-12) column 1, line 42 -column 2, line 2 column 3, line 61 -column 4, line 38; figures 1,4-6 -----	1,5
A	EP 0 221 475 A (TOKYO SHIBAURA ELECTRIC CO) 13 May 1987 (1987-05-13) the whole document -----	1
A	US 4 397 041 A (TAKEDA SHIGEKI ET AL) 2 August 1983 (1983-08-02) abstract column 2, line 41 -column 3, line 12; figures 1,2 column 3, line 35 -column 4, line 64; figure 3 -----	1,3,5
A	US 4 338 606 A (TADA MASAHIRO ET AL) 6 July 1982 (1982-07-06) column 1, line 58 -column 2, line 16 column 2, line 47 -column 3, line 45; figures 1,2 -----	9,11
A	DE 34 27 629 A (SIEMENS AG) 30 January 1986 (1986-01-30) page 4, line 5 - line 21 page 9, line 29 -page 11, line 30; figure 2 -----	9

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US 00/24708

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International Application No. PCT/US 00 24708

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-8

Apparatus for reducing multipath distortion in a television signal.

2. Claims: 9-13

Loop antenna.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/24708

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4100496	A	11-07-1978	JP 1257797 C	29-03-1985
			JP 52060046 A	18-05-1977
			JP 59031241 B	01-08-1984
			CA 1078957 A	03-06-1980
			GB 1568235 A	29-05-1980
GB 2257605	A	13-01-1993	NONE	
US 4497067	A	29-01-1985	JP 59013441 A	24-01-1984
			AU 559343 B	05-03-1987
			AU 1680883 A	19-01-1984
			CA 1203849 A	29-04-1986
			DE 3374258 D	03-12-1987
			EP 0099113 A	25-01-1984
US 4498885	A	12-02-1985	JP 59013442 A	24-01-1984
			AU 563228 B	02-07-1987
			AU 1680983 A	19-01-1984
			CA 1210073 A	19-08-1986
			DE 3361292 D	02-01-1986
			EP 0099112 A	25-01-1984
EP 0221475	A	13-05-1987	JP 62100034 A	09-05-1987
			DE 3683444 A	27-02-1992
US 4397041	A	02-08-1983	JP 56122503 A	26-09-1981
			JP 56122509 A	26-09-1981
			DE 3108029 A	14-01-1982
			GB 2089578 A, B	23-06-1982
US 4338606	A	06-07-1982	JP 55085106 A	26-06-1980
			JP 55085105 A	26-06-1980
			AU 532289 B	22-09-1983
			AU 5396579 A	26-06-1980
			CA 1128654 A	27-07-1982
			DE 2951875 A	10-07-1980
			FR 2445041 A	18-07-1980
			GB 2039152 A, B	30-07-1980
			NL 7909206 A, B,	24-06-1980
DE 3427629	A	30-01-1986	NONE	